



**MCR  
SAFETY**

# 48406T

**Welder  
Specification Sheet**

**PRODUCT DESCRIPTION:**

This MCR Safety Welding option is made of premium grain goatskin. This supple leather contains natural lanolin that helps create a very soft feel. Characteristics include strongest tensile strength and excellent tactile sensitivity. Best combination of flexibility and comfort. The 48406T is an unlined Mig/Tig glove with a 5 inch russet split cowskin cuff for additional safety. It is Thinsulate® lined for protection in cold environments. It is also sewn with DuPont™ Kevlar®, has a keystone thumb and a self-hem sewn cuff. The TPR back offers excellent impact resistance on the fingers and back of the hand.



**FEATURES:**

- Premium Top Grain Goatskin
- Padded palm
- Lined with 100g Thinsulate® for protection in cold environments
- Sewn with DuPont™ Kevlar®
- 11 Inch total length including a 5 inch brown split cow leather cuff
- Keystone Thumb

**APPLICATIONS:**

Agriculture, Automotive , Carpentry, Construction, Farming, Heavy Equipment Operator, Landscaping, Manufacturing, Mig/Tig, Ship building, Warehousing, Welding

**TECHNICAL DATA FOR: 48406T**

<b>Material Group</b>	Leather	<b>ANSI Puncture</b>	3
<b>Product Type</b>	Welder	<b>ANSI Abrasion</b>	3
<b>Glove Size</b>	Large	<b>ANSI Contact Heat</b>	3 - Less than 392°F
<b>Material</b>	Leather		
<b>Leather Cut</b>	Grain		
<b>Leather Type</b>	Goat		
<b>Grade</b>	Premium		

MCR Safety - 1255 Schilling Blvd. W. - Collierville, TN 38017 - USA

Phone: 901-795-5810 - Toll Free: 800-955-6887 - Fax: 800-999-3908 - Web: [www.mcrcsafety.com](http://www.mcrcsafety.com)

©2020 MCR Safety - All Rights Reserved




**MCR**  
**SAFETY**

# 48406T

## Welder Specification Sheet

<b>Features</b>	Sewn With KEVLAR
<b>Insulated</b>	Yes
<b>Lining</b>	Thinsulate
<b>Pattern</b>	Gunn
<b>Thumb Style</b>	Straight
<b>Thickness</b>	0.4 - 1.1 mm
<b>Made In</b>	Pakistan

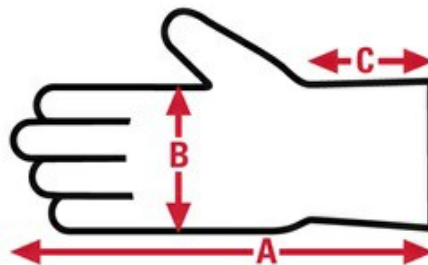

Item No:	Size:	A:	B:	C:	Case Weight	UOM Weight
48406TL	Large	0	0	N/A	55.440 lb.	0.770
48406TM	Medium	0	0	N/A	49.536 lb.	0.688
48406TXL	X - Large	0	0	N/A	58.248 lb.	0.809