



**MCR
SAFETY**

MG3211A

Cut Protection Specification Sheet

PRODUCT DESCRIPTION:

Alycore™ is one of the most cut and puncture resistant materials available. Our Alycore™ gloves offer maximum dexterity and sense of touch due to the high degree of flexibility and patent pending construction. All Alycore™ styles provide cut performance levels, which exceed ANSI and CE cut level 5 ratings. From wranglin' to buildin', these gloves are tough for the job! Cowhide is the most commonly used leather due to availability. Characteristics include a good balance between abrasion resistance, dexterity, durability and comfort. The MG3211A drivers gloves feature; unlined select cow grain leather, shirred elastic back, cotton hemmed, a keystone thumb pattern, and Alycore™ in the palm and fingers (see protection zones).



FEATURES:

- Made with Alycore™ Providing Cut and Puncture Resistance in Palm
- ANSI/ISEA A9 and CE level 5 Cut Scores
- Select Grade Grain Cowhide
- Keystone Thumb
- Launderable - Machine Wash, Do NOT machine dry

APPLICATIONS:

Cable , Construction, Demolition, Forestry, Lumber industry, Plywood industry, Rebar

TECHNICAL DATA FOR: MG3211A

Material Group	Leather	EN 388 : CE Score - Tear	3
Product Type	Cut Protection	ANSI Cut	A9
Glove Size	Large		
Material	Leather		
Leather Cut	Grain		
Leather Type	Cow		
Grade	Select Grade		
Features	Sold by pair		
Lining	Unlined		

MCR Safety - 1255 Schilling Blvd. W. - Collierville, TN 38017 - USA

Phone: 901-795-5810 - Toll Free: 800-955-6887 - Fax: 800-999-3908 - Web: www.mcrcsafety.com

©2019 MCR Safety - All Rights Reserved




MCR
SAFETY

MG3211A

Cut Protection Specification Sheet

Pattern Gunn
Thumb Style Keystone
Thickness 0.9 - 1.5 mm

Made In China

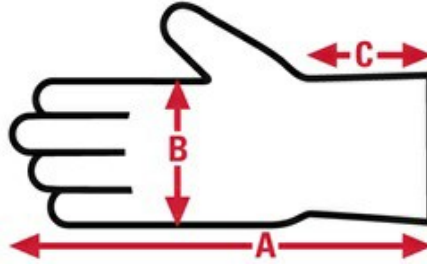

Item No:	Size:	A:	B:	C:	Case Weight	UOM Weight
MG3211AL	Large	10.000	5.000	0.000	43.776 lb.	0.608
MG3211AXXL	XX - Large	10.750	5.625	0.000	46.008 lb.	0.639
MG3211AXL	X - Large	10.750	5.250	0.000	47.808 lb.	0.664
MG3211AM	Medium	9.875	4.875	0.000	41.616 lb.	0.578