



**MCR
SAFETY**

VP9676 UltraTech Cut Protection Specification Sheet

PRODUCT DESCRIPTION:

One of the most distinguishing of DSM Dyneema® material is its cool-to-touch property. This fiber's inherent ability to dissipate body heat and pass moisture from inside of the glove to the outside, results in longer wear time which promotes greater hand protection. The VP9676 is vending packaged and features a 15 gauge DSM Certified Dyneema® Diamond Technology shell with PU coated palm and fingers. (Non-Vending Packaged option available - 9676).

FEATURES:

- Vending Packaged
- 15 Gauge Dyneema® Diamond Technology Salt & Pepper Blended Shell
- Gray PU Coated Palm and Fingers
- Cool and Comfortable

APPLICATIONS:

Automotive Assembly, Farming, Landscaping, Carpentry, Glass handling, HVAC, Janitorial , Roofing



TECHNICAL DATA FOR: VP9676

Series	UltraTech	EN 388: CE Score - Abrasion	4
Material Group	Strings	EN 388 : CE Score - Cut	3
Product Type	Cut Protection	EN 388 : CE Score - Tear	4
Glove Size	Large	EN 388 : CE Score - Puncture	3
Gauge	13 Gauge		
Material	Dyneema		
Made In	Sri Lanka		

MCR Safety - 1255 Schilling Blvd. W. - Collierville, TN 38017 - USA


Phone: 901-795-5810 - Toll Free: 800-955-6887 - Fax: 800-999-3908 - Web: www.mcrcsafety.com

©2020 MCR Safety - All Rights Reserved



MCR
SAFETY

VP9676
UltraTech
Cut Protection
Specification Sheet

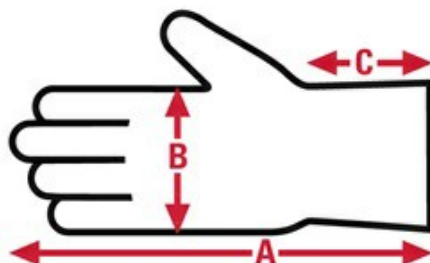

Item No:	Size:	A:	B:	C:	Case Weight	UOM Weight
VP9676L	Large	12.20	3.94	2.95	22.675 lb.	0.154
VP9676XL	X - Large	12.60	4.13	2.95	22.675 lb.	0.163
VP9676M	Medium	11.62	3.74	2.76	22.675 lb.	0.147

MCR Safety - 1255 Schilling Blvd. W. - Collierville, TN 38017 - USA

Phone: 901-795-5810 - Toll Free: 800-955-6887 - Fax: 800-999-3908 - Web: www.mcrcsafety.com

©2020 MCR Safety - All Rights Reserved