

CUT PROTECTION GUIDE



Innovations Technology Center (ITC Lab)

MCR Safety Innovations Technology Center 685 Highway 72 Piperton, TN 38017







In July of 2016, the MCR Safety's Innovations Technology Center had the pleasure of becoming one of the first North American testing labs to receive the ISO/IEC 17025 accreditation under the ANSI/ISEA 105 scope.

ISO/IEC 17025:2005 is the single most important standard for testing laboratories around the world.

Laboratories accredited to this international standard have demonstrated they are technically competent and able to produce precise and accurate test and/or calibration data.

MCR Safety's Innovations Technology Center (ITC) began operation in 2010. The three objectives at the forefront of the ITC lab development were:

- 1. Increase our ability to monitor the quality of incoming products produced at our factories.
- 2. Utilize the in-house testing laboratory, to increase Research & Development of new products and technologies.
- 3. Ensure that in-market comparisons between MCR Safety products and competitor products are viable. In other words, we want to ensure we are comparing apples-to-apples, and not apples-to-oranges.
- *All testing performed for MCR Safety distributors is done free of charge.

The full scope of the accreditation includes the following tests:



Cut Resistance Testing



Test Method ASTM F2992-15

Abrasion Resistance Testing



Test Method ASTM D3389-15 Coated Gloves ASTM D3884-09 Uncoated Gloves

Puncture Resistance Testing




Test Method EN 388-16

Tear Resistance Testing



Tear Testing EN 388-16

Conductive (Contact) Heat Resistance Test



Test Method ASTM F1060-08

"Integrity is doing what you say you will do" - Chuck Swindoll

Any glove company can market a cut resistant glove, however, has it passed the quality management testing process of an ISO 17025 laboratory which validates the performance levels? You can have 100% confidence that MCR Safety product will perform to the advertised cut resistant levels. These tests are not audited by OSHA or any government agency so it's up to the purchaser to determine the accuracy of testing. MCR Safety takes the guess work out by having our accredited lab perform testing so you can have 100% confidence that any MCR Safety product will perform to the advertised levels.

CUT PR

ANSI/ISEA 105-2016 Cut Resistance

Equipment: Tomodynamometer TDM-100

Blade Validation: Before and after each sample specimen is tested, the blades must be checked, to ensure the effective sharpness of the cutting edge.

Sample Prep:

- Three glove samples are required to perform the test
- The glove samples must be conditioned to specific environmental conditions
- A 2"x 4" swatch cut from the palm of each glove at a 45-degree angle
- The test sample is then mounted to the mandrel of the machine

Testing:

- Each of the three glove samples will receive a total of 15 cut through measurements.
- The 15 cut through measurements are broken out into 3 distinct distances:
- 5 data points in the 5mm to 20mm cut through distance range
- 5 data points in the 20mm to 33mm cut through distance range
- 5 data points in the 33mm to 50mm cut through distance range
- The plotting of these data points on graph, enables us to find the cut through distance at 20mm of blade travel.

Data Recorded:

		_			-				
		Sample 1 1820			Sample 2 1810			Sample 3 1718	
	Load (gf)	Distance (mm)	Norm. Distance (mm)	Load (gf)	Distance (mm)	Norm. Distance (MM)	Load (gf)	Distance (mm)	Norm Distance (MM)
Calibration Cut (Before)	500	15.85		500	15.31		500	17.80	
1	2000	9.06	11.63	2000	7.83	9.46	2000	18.05	19.25
2	2000	9.37	12.03	2000	13.90	16.79	2000	5.74	6.12
3	2000	12.46	15.99	2000	6.75	8.15		8.89	9.48
4	2000	5.02	6.44	2000	8.67	10.47		15.26	16.28
5	2000	5.08	6.52	2000	8.96	10.82	2000	8.02	8.55
6	1800	24.44	31.37	1800	31.69	38.28		20.86	22.25
7	1800	26.62		1800	20.28	24.50		21.18	22.59
8	1800	20.80	26.70		20.41	24.66	1600	24.94	26.60
9		31.20		1800	20.14	24.33		27.59	29.43
10		20.39		1800	26.79	32.36	1600	28.30	30.19
11	1400	44.80			33.17	40.07	1400	40.77	43.49
12	1400	33.44	42.93	1400	33,46	40.42	1400	33.20	35.41
13		40.60		1400	33.11	40.00	1400	38.15	40.69
14		33.03	42.40	1400	35.05	42.34	1400	39.11	41.72
15		40.11			41.10	49.65		33.47	35.70
Calibration Cut (After)	500	15.31		500	17.80		500	19.70	
	Sharpest	s Correction	1	Sharpess Co	orrection	1	Sharpess	Correction	1
		e Distance	20mm	Reference [20mm		e Distance	20mm
	Rating Fo		1820.16	Rating Force		1809.95	Rating Fo		1718.50
RESULTS		ience Interval (gf)	366.50		ce Interval (gf)	341.43		ence Interval (gf)	291.84
		Deviation (gf)	169.65	Standard De	rviation (gf)	158.04		Deviation (gf)	135.09
	R-Square		0.73	R-Squared		0.76	R-Square		0.81
	Correctio		0.13	Correction F		0.12	Correctio	0.09	
Optional Sample	Basis WT	3.11	Grams	Basis WT	3.59	Grams	Basis WT	3.11	Grams
Properties	Thicknes	0.97	MM	Thickness	0.98	MM	Thicknes	0.99	MM

Reporting and Averaging the 3 gram scores

	Average Rating Force (gf)	Cut Resistance Performance Level
(1783	A4
	Samples Tested ASTM F2992-15	ANSI/ISEA 105- 2016
	TDM-100	Section 5.11

ANSI/ISEA 105 2016 Cut Score Gram Levels

Cut Score Gram Levels
A9: 6,000+ grams to cut
A8: 5,000 to 5,999 grams to cut
A7: 4,000 to 4,999 grams to cut
A6: 3,000 to 3,999 grams to cut
A5: 2,200 to 2,999 grams to cut
A4: 1,500 to 2,199 grams to cut
A3: 1,000 to 1,499 grams to cut
A2: 500 to 999 grams to cut
A1: 200 to 499 grams to cut

Tomodynamometer TDM-100



Blade Validation



Sample Prep



Testing



Data Recorded



"It's only after you've stepped outside your comfort zone that you begin to change, grow, and transform." - Roy T. Bennett


Every day consists of change and improvement so at MCR Safety we are living this out by updating the most powerful cut protection offerings in the industry with a single brand that represents the best of the best in fibers, coatings, and technology advancements as CUTPRO. One unified brand identity along with an easy identifiable ANSI cut scoring system.

Glove Shell and Coating

Guess what?! The name is changing and that's it. The glove shell fiber combination and coating is staying exactly the same as before - No changes....Zero, Zilch, Zip, Nada

Inventory

During this transition, there is a good chance that you could receive old and new logo product however that's the only difference. The glove is the same product that we have manufactured for years which means we still have your back. Same protection, same glove, same piece of mind in wearing Protection You Can Trust!

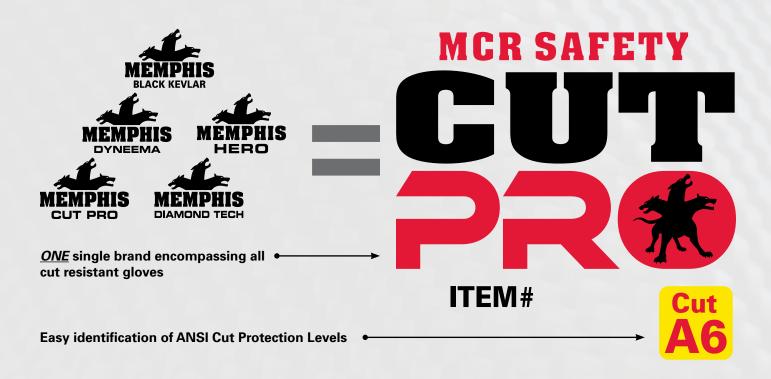

Understanding ANSI/ISEA 105 2016 Cut Score Gram Levels

















Extreme Cut Hazards	A9: 6,000+ grams to cut
Very High Cut Hazards	A8: 5,000 to 5,999 grams to cut
High Cut Hazards	A7: 4,000 to 4,999 grams to cut
Heavy Cut Hazards	A6: 3,000 to 3,999 grams to cut
Medium to Heavy Cut Hazards	A5: 2,200 to 2,999 grams to cut
Medium Cut Hazards	A4: 1,500 to 2,199 grams to cut
Light to Medium Cut Hazards	A3: 1,000 to 1,499 grams to cut
Light Cut Hazards	A2: 500 to 999 grams to cut
Not Recommended for Cut	A1: 200 to 499 grams to cut







ARX™ is an Aramid base fiber designed to protect against cut, abrasion, and flame resistant hazards which is available in coated knits, leather, and sleeve configurations. This fiber is developed and manufactured in MCR Safety's state of the art spinning facility where quality is never sacrificed. #WeProtectPeople

www.mcrsafety.com/cut-protection



HyperMax[™] synthetic yarns are engineered to protect against cuts and lacerations ranging from ANSI Cut Level A2 up to A9. Excellent abrasion properties and high levels of comfort are key to the success of this fiber. #WeProtectPeople

www.mcrsafety.com/cut-protection



Hero™ yarn takes cut protection to the next level without sacrificing comfort or dexterity. Made up of a combination of proprietary spun yarns designed and knitted exclusively in MCR Safety's spinning plant where quality is never sacrificed. #TrustedToProtect

www.mcrsafety.com/cut-protection



Kevlar® is the original gold standard in cut protection. Ideal for applications requiring cut and heat protection in one. Patented Kevlar® engineered yarns combine cut-resistant soft-spun Kevlar® materials, high-strength inorganic yarns and elastic stretch-core yarns to deliver the best balance of protection and comfort.

www.mcrsafety.com/gloves/technology/kevlar

#Kevlar



Dyneema® Diamond Technology is the latest patented fiber innovation from DSM Dyneema. This state-of-art technology is once again pushing forward the properties of cut resistance in a lightweight and "natural feeling" fiber. #Dyneema

www.mcrsafety.com/gloves/technology/dyneema













- ANSI A9 Cut Protection extreme slice resistant
- ANSI Puncture Level 3 prevention of penetrating hazards
- ANSI Contact Heat Level 5 Up to 608°F thermal protection

Applications:

- Heavy Material Fabrication
- Blade Handling
- High-Risk contact with glass, wire, metal, wood

93719MK Sleeve

- 19" length extended arm protection
- Elbow gusset improved range of motion
- Spandex hand cuff for stationary protection to allow use with gloves
- Gusset clip firm attachment to undergarment
- Ambidextrous



93709MK Sleeve

- 9" length forearm protection
- Spandex hand cuff for stationary protection to allow use with gloves
- Ambidextrous



93130MK Apron

- 30" x 24" torso protection
- Nylon/Neoprene neck strap all day comfort
- Nylon waist strap



92/35N	Seamiess	15	Hyperiviax		INITLIE		Yes	3	5	ı		
9381	Seamless	7	SteelCore		PVC blocks 1 side		Yes	4	Χ	Χ		
9382	Seamless	7	SteelCore		PVC blocks 2 sides		Yes	4	Χ	Χ		
A8 ANSI CUT ≥ 5000 Grams												
		C/		Ch - II		Dalm	ANCLICEA 10F	ANCI	ANCI	ANSI		
Item #	Туре	Gauge/ Lining	Fiber	Shell Color	Palm	Palm Color	ANSI-ISEA 125 Level 2 Cert	ANSI Abrasion	ANSI Puncture			
<i>Item #</i> 3604HP	<i>Type</i> Leather Driver	Lining N/A	<i>Fiber</i> HyperMax™		Palm Goatskin							
		Lining					Level 2 Cert			Conductive Heat X X		
3604HP	Leather Driver	<i>Lining</i> N/A	HyperMax™		Goatskin		Level 2 Cert Yes					



Alycore





- Alycore lined extreme cut protection
- Rough PVC palm abrasion resistant Emergency Personnel And First Responders




PD2905A Predator[™] Sizes: S-XXXL

Alycore

- Alycore lined extreme cut protection
- Synthetic suede palm with polymer pads tactile grip Scrap/Barbwire/Rebar Handling





- Hypermax[™] engineered yarn greater cut resistance
- Nitrile coated wet/dry grip Handling Extremely Sharp Materials





- Dual wrapped engineered yarn extreme cut protection
- Double sided PVC blocked increased grip/longevity
- Bleachable material greater launderability Meat Packing, Food Processing, Food Service







- Premium goatskin high tensile strength
- Breathable abrasive protection Heavy Metal Handling/Fabrication













- Hypermax[™] engineered yarn breathable abrasive protection
- Foam nitrile coated with EVA padded palm wet/dry grip with vibration reduction
 Paper Production, High-Risk Impact Tasks



• Reinforced over-edge thumb - extended wear life Rebar, Metal Stamping, Sheet Metal, Recycling

A7 ANSI CUT ≥ 4000 Grams											
Item #	Туре	Gauge/ Lining	Fiber	Shell Color	Palm	Palm Color	ANSI-ISEA 125 Level 2 Cert	ANSI Abrasion	ANSI Puncture	ANSI Conductive Heat	
93857	Seamless	7	Hero™		PVC dots 1 side		Yes	3	Χ	Χ	
93859	Seamless	7	Hero™		PVC dots 2 sides		Yes	3	Χ	Χ	
93868	Seamless	7	Hero™		PVC stripes		Yes	3	Χ	Χ	
93861	Seamless	7	Hero™		Split Cow		Yes	5	5	3	
92743BP	Seamless	13	HyperMax™		Bi-Polymer		Yes	3	5	Χ	
9345D	Seamless	7	Spectra®		Uncoated		Yes	Χ	Χ	Χ	
9349D	Seamless	7	Spectra®		Uncoated		Yes	Χ	Χ	Χ	







- Hero™ fiber Kevlar® and Synthetic combo
- Single sided PVC dots increased grip
- Reinforced over-edge thumb extended wear life Process Assembly, Metal Stamping, Machining Parts





- Hero[™] fiber Kevlar[®] and Synthetic combo
- · Double sided PVC dots increased grip/longevity
- · Reinforced over-edge thumb extended wear life Process Assembly, Metal Stamping, Machining Parts





- Hero[™] fiber Kevlar[®] and Synthetic combo
- Single sided PVC stripe increased grip
- Reinforced over-edge thumb extended wear life Process Assembly, Metal Stamping, Machining Parts




92743BP Sizes: S-XXL

 Hypermax[™] engineered yarn - puncture resistant palm Glass, Recycling, Contact With Jagged Edges










- 15 times stronger than steel
- · Made with FDA accepted material for use in food processing Food Processing, Canning, Stationary Blade Changeouts








- 15 times stronger than steel
- · Made with FDA accepted material for use in food processing Food Processing, Canning, Stationary Blade Changeouts


















- Hero[™] fiber Kevlar® and Synthetic combo
- · Uncoated excellent sense of touch Meticulous Processes, Sheet Metal Assembly, Machining Parts





- Hypermax[™] engineered yarn lined w/100g Thinsulate[™]
- MAXGrid[™] material on the palm for grip in dry, wet and oily conditions Winter Climates, Cold Storage









92730HV Sizes: XS-XXL


- Hypermax[™] engineered yarn breathable abrasive protection
- · Sandy nitrile coated abrasive gripping properties Metal Stamping, Frame Fabrication












- Hypermax[™] engineered yarn breathable abrasive protection
- Polyurethane (PU) coated excellent abrasion resistance Glass, Recycling, Contact With Jagged Edges









- Made with DuPont[™] Kevlar[®] trusted cut protection
- Breathable nitrile foam (BNF) coated great wet/dry grip
- Reinforced thumb crotch for longer wear life Glass Installers, Metal Sorting, Materials Coated with Oil












- Hypermax[™] engineered yarn breathable abrasive protection
- · Stainless steel reinforced increased cut resistance
- Mechanic Tasks, Pipe Fitting, Scrap Sorting























- · Aramid engineered yarn breathable cut/abrasive protection
- Polyurethane (PU) coated excellent abrasion resistance Connecting Metal Components, Fabricating Duct Work, Sheet Metal Fab
















- · Acrylic insulated Cold weather protection
- Dyneema® Diamond Technology protection without fiberglass
- Bi-polymer coated increased puncture resistance Cold Storage Package Handling, Brick Laying















 MAXGrid[™] reinforced palm for extreme grip conditions Impact-Pinch Point Hazards, Lumber Mills, Heavy Construction







- · ARX engineered yarn Excellent dexterity and flexibility
- · Foam nitrile coated wet/dry grip Product Handling Requiring Great Dexterity and Sense of Touch










FF2931 Sizes: M-XXL • Patented D30[®] metacarpal protection and padded palm

MAXGrid[™] reinforced palm for extreme grip conditions

 HyperMax[™] engineered palm liner Impact-Pinch Point Hazards, Lumber Mills, Heavy Construction





- Hypermax[™] lined 360° of cut resistance
- · Select grade grain goatskin high tensile strength
- TPR back for added impact protection Impact-Pinch Point Hazards, Lumber Mills, Heavy Construction














	U			וח עח	131 001 2 2200 (uranis				
Item #	Туре	Gauge/ Lining	Fiber	Shell Color	Palm	Palm Color	ANSI-ISEA 125 Level 2 Cert	ANSI Abrasion	ANSI Puncture	ANSI Conductive Heat
92738PU	Seamless	18	HyperMax™		Polyurethane		Yes	4	4	Χ
92901KD	Seamless	13	HyperMax™		Foam Nitrile		Yes	4	3	Χ
UT1954	Seamless	13	HyperMax™		Sandy Nitrile		Yes	5	4	Χ
UT1955	Seamless	13	HyperMax™	H-V	Sandy Nitrile		Yes	5	4	Χ
UT1956	Seamless	13	HyperMax™	H-V	Sandy Nitrile		Yes	5	3	X
36136KDP	Leather Driver	N/A	Kevlar [®]		Goatskin		Yes	4	Χ	3
36336K	Leather Driver	13	Kevlar®		Goatskin		Yes	Χ	3	3
									The Park	Marie Control of the








- Hypermax[™] engineered yarn breathable abrasive protection
- Polyurethane (PU) coated excellent abrasion resistance Metal Stamping, Pipe Cutting





- Hypermax[™] engineered yarn breathable abrasive protection
- Foam nitrile 3/4 double coated wet/dry grip Mechanics, Oil Coated Parts Handling





- 13-Gauge HyperMax[™] engineered shell
- · Sandy Foam Nitrile coated palm and fingers
- TPR metacarpal protection Metal Stamping, Pipe Cutting



- TPR metacarpal protection
- Reinforced thumb crotch
- Palm Padded

Metal Stamping, Pipe Cutting





- 13-Gauge CUT PRO® HyperMax[™]/Acrylic winter shell
- · Sandy Foam Nitrile coated palm and fingers
- TPR metacarpal protection
- · Reinforced thumb crotch
- · Tailored for cold conditions Metal Stamping, Pipe Cutting





- · Unique oil blocking technology oily environments
- Lined with DuPont[™] Kevlar[®] 360° cut protection
- Premium goatskin high tensile strength
- Double stitched with Kevlar® thread greater seam strength Pipe Fitter, Gas Cylinder Manufacturing, Rope Handler



UT295	3			A4 AI	NSI CUT≥ 1500 (Grams	;			
Item #	Туре	Gauge/ Lining	Fiber	Shell Color	Palm	Palm Color	ANSI-ISEA 125 Level 2 Cert	ANSI Abrasion	ANSI Puncture	ANSI Conductive Heat
3613H	Leather Driver	N/A	ARX		Goatskin		Yes	4	3	3
90730	Seamless	13	Dyneema®		Sandy Nitrile		Yes	4	3	Χ
PD2953	Seamless	13	Dyneema®		Foam Nitrile		Yes	4	4	1
N6464	Seamless	10	Dyneema®		Coral		Yes	4	Χ	Χ
9818NF	Seamless	18	HyperMax™		Foam Nitrile		Yes	5	4	Х
92745PU	Seamless	15	HyperMax™		Polyurethane		Yes	4	3	X
92773	Seamless	15	HyperMax™		Polyurethane		Yes	4	3	Χ
UT1951	Seamless	13	HyperMax™		Latex		Yes	4	5	Χ
UT1952	Seamless	13	HyperMax™		Sandy Nitrile		Yes	4	4	Χ
UT1953	Seamless	13	HyperMax™	H-V	Sandy Nitrile		Yes	4	4	X
9273HV	Seamless	13	HyperMax™	H-V	Foam Nitrile	H-V	Yes	4	3	Χ
92753PU	Seamless	13	HyperMax™		Polyurethane		Yes	Χ	Χ	X
92753	Seamless	13	HyperMax™		Foam Nitrile		Yes	5	2	Χ
92783	Seamless	13	HyperMax™		Foam Nitrile		Yes	4	5	1
UT2952	Mechanics	13	HyperMax™		Foam Nitrile	H-V	Yes	5	4	1
UT2953	Mechanics	13	HyperMax™		Foam Nitrile	H-V	Yes	5	4	1
MC500	Mechanics	10	HyperMax™	H-V	Silicone Blocks		Yes	6	Χ	Χ
PD1902	Mechanics	N/A	HyperMax™		Silicone Tread		Yes	5	2	Χ
PD2909	Mechanics	N/A	HyperMax™		Silicone Tread		Yes	5	2	Χ
4955H	Welder	N/A	HyperMax™		Grain Cow		Yes	4	3	3







- Hypermax[™] engineered yarn breathable abrasive protection
- · Foam nitrile coated wet/dry grip Product Handling Requiring Great Dexterity and Sense of Touch














- Hypermax[™] engineered yarn breathable abrasive protection
- · Foam nitrile coated wet/dry grip Gear Box Clean Out, Machine Shop Operators











- Hypermax[™] engineered yarn breathable abrasive protection
- · Foam nitrile double coated wet/dry grip Gear Box Clean Out, Machine Shop Operators











92773 Sizes: S-XL

- Hypermax™ engineered yarn greater cut resistance
- Polyurethane (PU) coated excellent abrasion resistance Assembly Production, Where Extreme Sense of Touch is Needed





- Hypermax[™] engineered yarn breathable abrasive protection
- Foam nitrile 3/4 double coated wet/dry grip Mechanics, Oil Coated Parts Handling














UT2952 Sizes: S-XXL

- Hypermax[™] engineered yarn breathable abrasive protection
- · Foam nitrile coated wet/dry grip
- TPR protection bump prevention Pipe Handling, Construction, High-Risk Impact Tasks





- DuPont™ Kevlar® engineered yarn cut resistant
- Foam latex coated Dry gripping power, tactile sensitivity Brick/Concrete Block Handling, Construction Installation





- DuPont™ Kevlar® engineered yarn cut resistant
- Polyurethane (PU) coated excellent abrasion resistance Precision Assembly, Wire Stripping, Handling




9178NFO Sizes: XS-XXL

Kevlar.

- DuPont™ Kevlar® engineered yarn cut resistant
- Foam nitrile coated wet/dry grip Sheet Metal Assembly, Mill Operators, Injection Molding





- 9178NF Sizes: XS-XXXL
 DuPont™ Kevlar® engineered yarn cut resistant
- Foam nitrile coated wet/dry grip Rough Material Sorting, Heavy Equipment Mechanic

A4 ANSI CUT ≥ 1500 Grams											
Item #	Туре	Gauge/ Lining	Fiber	Shell Color	Palm	Palm Color	ANSI-ISEA 125 Level 2 Cert	ANSI Abrasion	ANSI Puncture	ANSI Conductive Heat	
9178LO	Seamless	13	Kevlar®	H-V	Foam Latex	H-V	Yes	4	3	2	
9178PU0	Seamless	13	Kevlar [®]	H-V	Polyurethane	H-V	Yes	4	Χ	2	
9178NF0	Seamless	13	Kevlar®	H-V	Foam Nitrile	H-V	Yes	4	4	2	
9178NF	Seamless	13	Kevlar®		Foam Nitrile		Yes	6	4	Χ	
9379ARC	Seamless	13	Kevlar®		APG		Yes	Χ	3	Χ	
9389PV	Seamless	13	Kevlar®		HPT		Yes	4	2	Χ	
9389	Seamless	13	Kevlar®		Latex		Yes	3	4	Χ	
93891PU	Seamless	10	Kevlar®		Polyurethane		Yes	5	3	Χ	
96871	Seamless	10	Kevlar®		Latex		Yes	4	5	Χ	
9366KF	Seamless	7	Kevlar®		PVC dots 2 sides		Yes	Χ	Χ	Χ	
9399	Seamless	7	Kevlar®		Uncoated		Yes	Χ	Χ	2	
9370KF	Seamless	7	Kevlar®		Uncoated		Yes	Χ	Χ	Χ	
MU3624GK	Mechanics	13	Kevlar®		Goatskin		Yes	4	4	3	
MU3624K	Mechanics	13	Kevlar®		Goatskin		Yes	4	4	3	
MU3634K	Mechanics	13	Kevlar [®]		Goatskin		Yes	4	4	3	
PD2952	Mechanics	10	Kevlar [®]		Foam Nitrile		Yes	3	4	Χ	
KV200	Mechanics	N/A	Kevlar [®]		Textured PU		Yes	4	4	Χ	
4840K	Welder	13	Kevlar [®]		Goatskin		Yes	3	3	3	
48406K	Welder	N/A	Kevlar®		Goatskin		Yes	3	3	3	
MU3624FR	Utility Driver	N/A	Kevlar®		Goatskin		Yes	4	4	3	
MU3624GFR	Utility Driver	N/A	Kevlar®		Goatskin		Yes	4	4	3	








9389PV Sizes: S-XXL

- Made with DuPont[™] Kevlar[®] trusted cut protection
- Hydropellent Technology (HPT) coated liquid repellent grip Glass Manufacturing, Lumber Grader, Blade Changeouts







- Made with DuPont[™] Kevlar[®] trusted cut protection
- Polyurethane (PU) coated excellent abrasion resistance Steel Banding Operator, Metal Deburring






KV200 Sizes: M-XXL


- Lined with DuPont[™] Kevlar[®] 360° of cut resistance
- TPR Protection impact and bump prevention
- Textured PVC palm/tips abrasive gripping power Handling Construction Materials, Pipe Fitting





- Lined with DuPont™ Kevlar® 360° cut protection
- Premium goatskin high tensile strength
- Double stitched with Kevlar® thread greater seam strength Steel Fabrication, Cable Pulling, Mig-Tig Welding





Kevlar

- Lined with DuPont[™] Kevlar[®] 360° cut protection
- Premium goatskin high tensile strength
- Double stitched with Kevlar® thread greater seam strength Double stitched with Kevlar® thread greater seam strength Pipe Fitter, Gas Cylinder Manufacturing, Rope Handler






Kevlar

- Lined with DuPont[™] Kevlar[®] 360° cut protection
- · Premium goatskin high tensile strength
- Pipe Fitter, Welding Trade, Ship Building






- Dyneema® Diamond Technology Shell excellent cut, abrasion, and overall comfort
- Polyurethane (PU) coated excellent abrasion resistance Material Handling, Misc Sharp Objects









- Dyneema® Diamond Technology Shell excellent cut, abrasion, and overall comfort
- Breathable nitrile foam (BNF) coated great wet/dry grip
- · Reinforced thumb crotch for longer wear life Glass Installers, Metal Sorting, Materials Coated with Oil









9676 Sizes: XS-XXL

- Dyneema® Diamond Technology Shell excellent cut, abrasion, and overall comfort
- Polyurethane (PU) coated excellent abrasion resistance Material Handling, Misc Sharp Objects
- Contact With Sharp Parts, Cooler than Traditional Fibers




A3 ANSI CUT ≥ 1000 Grams											
Item #	Туре	Gauge/ Lining	Fiber	Shell Color	Palm	Palm Color	ANSI-ISEA 125 Level 2 Cert	ANSI Abrasion	ANSI Puncture	ANSI Conductive Heat	
90750	Seamless	15	Dyneema®		Sandy Nitrile		Yes	4	3	Χ	
90752	Seamless	15	Dyneema®		Polyurethane		Yes	5	3	Χ	
N9676DT	Seamless	15	Dyneema®		BNF (Nitrile)		Yes	Χ	3	Χ	
9672	Seamless	13	Dyneema®		Polyurethane		Yes	5	3	Χ	
9676	Seamless	13	Dyneema®		Polyurethane		Yes	6	3	Χ	
9677	Seamless	13	Dyneema®		Polyurethane		Yes	5	3	Χ	
N9677	Seamless	13	Dyneema®		Polyurethane		Yes	5	3	Χ	
N96780	Seamless	13	Dyneema®		Nitrile Wave		Yes	5	4	Χ	
96720NF	Seamless	13	Dyneema®		Foam Nitrile		Yes	5	3	Χ	
9672DT	Seamless	13	Dyneema®		Bi-Polymer		Yes	5	3	Χ	
N9676G	Seamless	10	Dyneema®		Bi-Polymer		Yes	5	3	Χ	
N9676GKD	Seamless	10	Dyneema®		Bi-Polymer		Yes	5	3	Χ	
9278NF	Seamless	18	HyperMax™		Foam Ńitrile		Yes	4	4	Χ	
92715PU	Seamless	15	HyperMax™		Polyurethane		Yes	5	4	Χ	
92715NF	Seamless	15	HyperMax™		Foam Nitrile		Yes	4	4	Χ	
92737	Seamless	13	HyperMax™		Silicone	Clear	Yes	6	3	Χ	
92752	Seamless	13	HyperMax [™]		Polyurethane		Yes	4	4	Χ	
92733PU	Seamless	13	HyperMax™		Polyurethane		Yes	4	3	Χ	
PD2955	Mechanics	13	HyperMax™		Foam Nitrile		Yes	4	4	1	
9348D	Seamless	13	Spectra®		Uncoated		Yes	3	Χ	Χ	












- Hypermax[™] engineered yarn breathable abrasive protection
- Polyurethane (PU) coated excellent abrasion resistance Material Handling, Misc Sharp Objects






- Dyneema® Diamond Technology Shell excellent cut, abrasion, and overall comfort
- Foam nitrile coated wet/dry grip Material Handling, Misc Sharp Objects









- Hypermax[™] engineered yarn breathable abrasive protection
- Clear Silicone coated Naturally Antimicrobial, Health Care, Electrical





- Hypermax[™] engineered yarn breathable abrasive protection
- Polyurethane (PU) coated excellent abrasion resistance Material Handling, Misc Sharp Objects





- Hypermax[™] engineered yarn breathable abrasive protection
- Polyurethane (PU) coated excellent abrasion resistance Material Handling, Misc Sharp Objects





- Hypermax[™] engineered yarn breathable abrasive protection
- Foam nitrile coated wet/dry grip Material Handling, Misc Sharp Objects



- DuPont[™] Kevlar[®] engineered yarn cut resistant
- Breathable nitrile foam (BNF) coated great wet/dry grip Demolition Work, Rough Material Handling



9687 Sizes: S-XXL

Kevlar.

- Made with DuPont[™] Kevlar[®] trusted cut protection
- Textured latex coated dry gripping power
- ANSI Contact Heat Rating Level 4 500°F and lower Handling Aggregate, Recycle Sorting



9365 Sizes: S-XL

Kevlar.

- Made with DuPont™ Kevlar® trusted cut protection
- PVC palm dotted one sided grip Handling Of Sharp Metal Materials, Parts Assembly



9686 Sizes: S-XL

- Made with DuPont[™] Kevlar[®] trusted cut protection
- Select split cowhide good abrasion protection
- ANSI Contact Heat Rating Level 3 392°F and lower Steel Fabrication, Hot Metal Work

	A3 ANSI CUT ≥ 1000 Grams											
Item #	Туре	Gauge/ Lining	Fiber	Shell Color	Palm	Palm Color	ANSI-ISEA 125 Level 2 Cert	ANSI Abrasion	ANSI Puncture	ANSI Conductive Heat		
N9878BNF	Seamless	18	Kevlar®		BNF (Nitrile)		Yes	6	2	X		
9687	Seamless	10	Kevlar®		Latex		Yes	4	5	4		
9365	Seamless	7	Kevlar®		PVC dots 1 side		Yes	3	Χ	Χ		
9366	Seamless	7	Kevlar®		PVC dots 2 sides		Yes	3	Χ	Χ		
9686	Seamless	7	Kevlar®		Split Cow		Yes	5	4	3		
9370	Seamless	7	Kevlar®		Uncoated		Yes	2	Χ	3		
9373	Seamless	7	Kevlar®		Uncoated		Yes	2	Χ	3		
9375	Seamless	7	Kevlar®		Uncoated		Yes	Χ	Χ	3		
9367	Seamless	7	Kevlar®		Uncoated		Yes	2	Χ	3		
9370BK	Seamless	7	Kevlar®		Uncoated		Yes	Χ	Χ	Χ		
9784IKO	Supported	N/A	Kevlar®		Nitrile		Yes	6	2	4		
9760K	Supported	N/A	Kevlar®		Nitrile		Yes	3	Χ	3		
9760KW	Supported	N/A	Kevlar®		Nitrile		Yes	3	Χ	3		
4850K	Welder	13	Kevlar®		Goatskin		Yes	3	3	2		







Kevlar.

- Made with DuPont[™] Kevlar[®] trusted cut protection
- Uncoated reversible for double use
- ANSI Contact Heat Rating Level 3 392°F and lower Sheet Metal Assembly, Automotive Fabrication



Kevlar.



9370BK Sizes: XS-XL

- Made with DuPont[™] Kevlar[®] trusted cut protection
- Uncoated reversible for double use
- ANSI Contact Heat Rating Level 3 392°F and lower Automotive Fabrication and Assembly







9760K Size: L

- Lined with DuPont[™] Kevlar[®] palm only
- Nitrile 3/4 coated wet/dry grip Handling Sharp Materials Coated In A Liquid Substance





9373 Sizes: S-XL

- Made with DuPont[™] Kevlar[®] trusted cut protection
- Uncoated reversible for double use
- ANSI Contact Heat Rating Level 3 392°F and lower Touchscreen Operators, Small Parts Handling







9784IKO Sizes: M-XL

- Nitrile outer shell lined with DuPont[™] Kevlar[®] chemical and cut resistant
- Cotton interlock inner shell comfort Clean Out Tasks, Parts Cleaning









- Lined with DuPont[™] Kevlar[®] 360° of cut resistance
- Premium goatskin high tensile strength Welding Intricate Parts, Strapping With Metal Banding



A3 ANSI CUT ≥ 1000 Grams Shell Gauge/ Lining ANSI-ISEA 125 ANSI ANSI ANSI Palm Fiber Item # Type Palm Color Level 2 Cert Abrasion Puncture Conductive Heat Color 9470K HotMill N/A Kevlar® Nitrile Blocks Χ 5 Yes Χ 3601K Leather Driver 13 Kevlar® Goatskin Yes 3 3 2 1700K Leather Palm N/A Kevlar® A+ Grade Cow 5 5 3 Yes 5 1702 Leather Palm N/A Kevlar® A+ Grade Cow Yes 5 3 Kevlar® Χ 1400K Leather Palm 10 Split Cow Yes 5 Kevlar® 3 2 918 Mechanics N/A Reinforced PVC Yes 4 Kevlar® 3 917 Mechanics N/A Reinforced PVC Yes





Kevlar.



9470K Size: L, 9471K Size: M, 9472K Size: S

- Heavy weight outer shell made with DuPont[™] Kevlar[®] -360° of cut resistance
- Inner shell heavy weight Cotton thermal protection
- ANSI Contact Heat Rating Level 5 608°F and lower
- Nitrile block coated double sided Parts Removal For Injection Molding, Hot Metals





1700K Big Jake® Size: XL

- Lined with DuPont[™] Kevlar[®] 360° of cut resistance
- Premium split cowhide extreme abrasion protection
- ANSI Contact Heat Rating Level 3 392°F and lower Lumber Sorting, Plywood Handling, Steel Fabrication



Kevlar.





1702 Big Jake® Sizes: M-XL

- Lined with DuPont[™] Kevlar[®] palm coverage only
- Premium split cowhide extreme abrasion protection
- ANSI Contact Heat Rating Level 3 392°F and lower Lumber Sorting, Plywood Handling, Steel Fabrication





1400K Sizes: S-XXL

- Lined with DuPont[™] Kevlar[®], plaited with cotton thermal and cut resistant
- Select split cowhide good abrasion protection
- ANSI Contact Heat Rating Level 4 500°F and lower Lumber Sorting, Plywood Handling, Steel Fabrication



Kevlar





918 Sizes: S-XXXL

- Lined with DuPont[™] Kevlar[®] 360° of cut resistance
- · Waterproof bladder -

dry and warm hands for all day comfort

Equipment Operators, Construction With Sharp Materials, Pipe Fitters



917 Sizes: S-XXXL

- Lined with DuPont[™] Kevlar[®] 360° of cut resistance
- Reinforced PVC palm extended protection and wear life Equipment Operators, Construction With Sharp Materials, Pipe Fitters



Material Handling, Misc Sharp Objects

	A2 ANSI CUT ≥ 500 Grams											
Item #	Туре	Gauge/ Lining	Fiber	Shell Color	Palm	Palm Color	ANSI-ISEA 125 Level 2 Cert	ANSI Abrasion	ANSI Puncture	ANSI Conductive Heat		
9672DT2	Seamless	18	Dyneema®		Polyurethane		Yes	3	2	Χ		
90780	Seamless	18	Dyneema®		Sandy Nitrile		Yes	4	2	Χ		
92718NF	Seamless	18	HyperMax™		Foam Nitrile		Yes	4	3	Χ		
96782	Seamless	18	HyperMax™		Nitrile		Yes	5	3	Χ		
92718PU	Seamless	18	HyperMax™		Polyurethane		Yes	3	4	Χ		
92723NF	Seamless	13	HyperMax™		Foam Nitrile		Yes	5	4	Χ		
92723HV	Seamless	13	HyperMax™	H-V	Foam Nitrile	H-V	Yes	6	3	Χ		














- Dyneema® Diamond Technology Shell excellent cut, abrasion, and overall comfort
- · Sandy nitrile coated textured grip Material Handling, Misc Sharp Objects





- Dyneema® Diamond Technology Shell excellent cut, abrasion, and overall comfort
- Polyurethane (PU) coated Good abrasion resistance Material Handling, Misc Sharp Objects














- Hypermax[™] engineered yarn good cut resistance
- Polyurethane (PU) coated good abrasion resistance
- · Reinforced thumb crotch for longer wear life Material Handling, Misc Sharp Objects








92718PU Sizes: XS-XXL


- Hypermax™ engineered yarn good cut resistance
- Polyurethane (PU) coated excellent abrasion resistance Thin Gauge Metal Sheet Handling, Applications Requiring Ultra Dexterity





- Hypermax™ engineered yarn good cut resistance
- · Foam nitrile coated wet/dry grip Material Handling, Misc Sharp Objects





- Hypermax™ engineered yarn good cut resistance
- Extended Cuff increased forearm protection Material Handling, Misc Sharp Objects





















- Made with DuPont[™] Kevlar[®] trusted cut protection
- Polyurethane (PU) coated good abrasion resistance Material Handling, Misc Sharp Objects



9693 Sizes: S, L

Kevlar.

- Made with DuPont[™] Kevlar[®] trusted cut protection
- Textured Nitrile coated great gripping power Material Handling, Misc Sharp Objects







9396 Sizes: S, L

- Made with DuPont[™] Kevlar[®] trusted cut protection
- PVC palm dotted two sided grip for double use Material Handling, Misc Sharp Objects

Protection on the job. For life off the job.

Gloves and sleeves made with Kevlar are designed with a patented and innovative yarn technology that provides

- $\boldsymbol{\cdot}$ The highest cut protection at the lowest weight
- · Unparalleled comfort and dexterity
- · Heat performance against a range of hazards

Because we don't just see a foreman, we see a father. We don't see a machinist, we see a mother. And every worker the job depends on has someone depending on them to get home safely. That's why we work with our partners, doing whatever it takes to protect hands at work. So those hands can make a home.

What do your hands carry?

DuPont[™], the DuPont Oval Logo and Kevlar[®] are trademarks or registered trademarks of DuPont or its affiliates. Copyright © 2019 DuPont de Nemours Inc.


Kevlar.

A2 ANSI CUT ≥ 500 Grams										
Item #	Туре	Gauge/ Lining	Fiber	Shell Color	Palm	Palm Color	ANSI-ISEA 125 Level 2 Cert	ANSI Abrasion	ANSI Puncture	ANSI Conductive Heat
9693PU	Seamless	15	Kevlar®		Polyurethane		Yes	Χ	2	Χ
9693	Seamless	13	Kevlar®		Nitrile		Yes	3	2	2
9396	Seamless	13	Kevlar [®]		PVC dots 2 sides		Yes	Χ	Χ	3
9392	Seamless	10	Kevlar®		PVC dots 2 sides		Yes	Χ	Χ	Χ
9390PD	Seamless	10	Kevlar®		PVC dots 2 sides		Yes	Χ	Χ	Χ
9370H	Seamless	7	Kevlar®		Honey Grip		Yes	Χ	Χ	Χ
9363MB	Seamless	7	Kevlar®		PVC blocks 2 sides		Yes	3	3	Χ
9361	Seamless	7	Kevlar®		PVC dots 1 side		Yes	Χ	Χ	Χ
9369	Seamless	7	Kevlar®		PVC dots 2 sides		Yes	2	Χ	Χ
9366E	Seamless	7	Kevlar®		PVC dots 2 sides		Yes	3	Χ	Χ
9363	Seamless	7	Kevlar®		PVC dots 2 sides		Yes	Χ	Χ	Χ
9363E	Seamless	7	Kevlar®		PVC dots 2 sides		Yes	Χ	Χ	Χ
9368	Seamless	7	Kevlar®		PVC flat coat		Yes	Χ	Χ	Χ
9380	Seamless	7	Kevlar®		Split Cow		Yes	Χ	4	Χ









- Made with DuPont™ Kevlar® trusted cut protection
- PVC honey grip coated two sided grip for double use Material Handling, Misc Sharp Objects








9361 Sizes: S, L

- Made with DuPont™ Kevlar®, plaited with cotton cut and heat resistant
- PVC palm dotted one sided grip Material Handling, Misc Sharp Objects







- Made with DuPont[™] Kevlar[®], plaited with cotton cut and heat resistant
- PVC flat coated one sided grip Material Handling, Misc Sharp Objects



9363MB Sizes: S, L

- Made with DuPont[™] Kevlar[®], plaited with cotton cut and heat resistant
- PVC blocked coated two sided for double use Material Handling, Misc Sharp Objects







9363 Sizes: XS-XL

- Made with DuPont[™] Kevlar[®], plaited with cotton cut and heat resistant
- PVC palm dotted two sided grip for double use Material Handling, Misc Sharp Objects





9380 Sizes: S-XL

- Made with DuPont™ Kevlar®, plaited with cotton cut and heat resistant
- Split cowhide palm great puncture resistance Material Handling, Misc Sharp Objects



9393 Sizes: S-XL

- Made with DuPont[™] Kevlar[®] trusted cut protection
- Uncoated reversible for double use
- ANSI Contact Heat Rating Level 3 392°F and lower Material Handling, Misc Sharp Objects







9394 Sizes: XS-XL

- Made with DuPont[™] Kevlar[®] trusted cut protection
- · Uncoated reversible for double use
- ANSI Contact Heat Rating Level 3 392°F and lower Material Handling, Misc Sharp Objects



9390 Sizes: S, L

- Made with DuPont[™] Kevlar[®] trusted cut protection
- Uncoated reversible for double use Material Handling, Misc Sharp Objects



9362 Sizes: S-XL

- Made with DuPont[™] Kevlar[®], plaited with cotton cut and heat resistant
- Uncoated reversible for double use Material Handling, Misc Sharp Objects

A2 ANSI CUT ≥ 500 Grams										
Item #	Туре	Gauge/ Lining	Fiber	Shell Color	Palm	Palm Color	ANSI-ISEA 125 Level 2 Cert	ANSI Abrasion	ANSI Puncture	ANSI Conductive Heat
9393	Seamless	13	Kevlar®		Uncoated		Yes	Χ	Χ	3
9394	Seamless	13	Kevlar®		Uncoated		Yes	Χ	Χ	3
9397	Seamless	13	Kevlar®		Uncoated		Yes	Χ	Χ	3
9390	Seamless	10	Kevlar®		Uncoated		Yes	Χ	Χ	Χ
9390P	Seamless	10	Kevlar®		Uncoated		Yes	Χ	Χ	Χ
9362	Seamless	7	Kevlar®		Uncoated		Yes	Χ	Χ	Χ
3204K	Leather Driver	7	Kevlar®		Grain Cow		Yes	4	3	3
6620KV	Supported	N/A	Kevlar®		PVC		Yes	5	2	Χ
9430KM	TerryCloth	N/A	Kevlar®		Uncoated		Yes	Χ	Χ	4
9430KME	TerryCloth	N/A	Kevlar®		Uncoated		Yes	Χ	Χ	4
9432KM	TerryCloth	N/A	Kevlar®		Uncoated		Yes	Χ	Χ	4
9433KM	TerryCloth	N/A	Kevlar®		Uncoated		Yes	Χ	Χ	4
9435KM	TerryCloth	N/A	Kevlar®		Uncoated		Yes	Χ	Χ	4
9436KM	TerryCloth	N/A	Kevlar®		Uncoated		Yes	Χ	Χ	4








Kevlar.

- Lined with DuPont[™] Kevlar[®] 360° of cut resistance
- Select Grain Cowhide Palm excellent abrasion Tig Welding, Material Handling, Misc Sharp Objects



Kevlar.



- Regular weight loop out terry made with DuPont™ Kevlar®, plaited with cotton - cut and heat resistant
- ANSI Contact Heat Rating Level 4 500°F and lower Hot Material Handling, Sharp Plastic Molding



Kevlar.



6620KV Sizes: M-XXXL

- Lined with DuPont[™] Kevlar[®] 360° of cut resistance
- PVC Liquid resistant shell dry hands for all day comfort Valve Replacements, Degreasing Applications



9433KM Size: L

Kevlar.

- Loop out terry made with DuPont[™] Kevlar[®], plaited with cotton - cut and heat resistant
- ANSI Contact Heat Rating Level 4 500°F and lower Hot Material Handling, Sharp Plastic Molding



Kevlar



9435KM Sizes: XS-L

- Loop out terry made with DuPont™ Kevlar®, plaited with cotton - cut and heat resistant
- Reinforced thumb crotch abrasion protection for longer wear life Hot Material Handling, Sharp Plastic Molding



Kevlar.

9430KME Size: L

- Competitive value weight loop out terry made with DuPont™ Kevlar®, plaited with cotton cut and heat resistant
- ANSI Contact Heat Rating Level 4 500°F and lower Hot Material Handling, Sharp Plastic Molding





Premium Grade Sleeve:


Made with more $\mathsf{DuPont}^\mathsf{m}$ Kevlar® material per square inchless material stretch



Competitive Value Grade Sleeve:

Made with less DuPont™ Kevlar® material per square inch - more material stretch







Sleeve Length													
Fiber	4"	7"	8"	9"	10"	12"	14"	15"	18"	19"	21"	22"	24"
Kevlar® Blend				•	•	•	•		•	•		•	•
SteelCore						•			•		•		
Hero™									•				
Dyneema®						•	•		•				
Kevlar®	•	•	•		•	•	•	•	•			•	•
HyperMax™						•	•		•				
Competitive Value					•		•		•			•	















Bar Tack

Thumb Slot

Cotton Interior

Elbow Gusset

Leather Pad Silicone Mini-Dots

Silicon Grid

Sleeve Options								
Fiber	Bar Tack	Thumb Slot	Cotton Interior	Elbow Gusset	Leather Pad	Silicone Mini-Dots	Silicon Grid	
Kevlar® Blend	-	•	•	-	-	-	-	
SteelCore	-	-	-	-	-	-	-	
Hero™	-	•	-	-	-	-	-	
Dyneema®	-	•	-	•	-	•	•	
, Kevlar®	•	•	-	•	•	-	-	
HyperMax™	-	-	-	-	-	-	-	
Competitive Value	•	•	-	-	-	-	-	



Kevlar® Blend

N/A

Thumb Slot

9378KFT

Sleeve

18"

Premium

Χ

Uncoated

Χ

Χ









9312, 9318, 9321

- · Steelcore yarn cut resistant
- Available in 12", 18", 21" length
- Made with FDA accepted material for use in food processing Food Processing, Canning, Stationary Blade Changeouts



91780 Size: 18"

- $DuPont^{™}$ Kevlar® engineered yarn cut resistant
- Advanced elbow gusset great range of motion and comfort Sheet Metal Assembly, Mill Operators, Injection Molding







- Made with DuPont[™] Kevlar[®] trusted cut protection
- Thumb Slot Recycling, Parts Sorting, Corrugated Handling







9318K13T Size: 18"

- Hero[™] fiber Kevlar[®] and synthetic combo
- Available with or without thumb slot Process Assembly, Metal Stamping, Machining Parts











9318DT10 Size: 18"

- Dyneema® Diamond Technology protection without fiberglass
- Double sided silicone grid prevents movement and slicing on arm while handling materials
- Advanced elbow gusset great range of motion and comfort Metal Fabrication, Plastic Moldings, Raw Glass Handling



9374TL Size: 14"

- Made with DuPont[™] Kevlar[®] trusted cut protection
- Thumb Slot with Leather forearm -Protection from heat and abrasion Handling Of Sharp Metal Materials, Parts Assembly



Item #	Туре	Length	Grade	Fiber	Gauge/ Lining	Configuration	Finish	ANSI Abrasion	ANSI Puncture	ANSI Conductive Heat	
9304	Sleeve	4"	Premium	Kevlar [®]	N/A	Plain	Uncoated	2	Χ	2	-
9307	Sleeve	7"	Premium	Kevlar®	N/A	Plain	Uncoated	2	Χ	2	4
9371	Sleeve	10"	Premium	Kevlar®	N/A	Plain	Uncoated	2	Χ	2	2
9371BE	Sleeve	10"	Competitive Value	Kevlar®	N/A	Bar Tack	Uncoated	2	Χ	Χ	3
9371E	Sleeve	10"	Competitive Value	Kevlar [®]	N/A	Plain	Uncoated	2	Χ	3	E
9371TE	Sleeve	10"	Competitive Value	Kevlar [®]	N/A	Thumb Slot	Uncoated	2	Χ	3	ò
9371T	Sleeve	10"	Premium	Kevlar®	N/A	Thumb Slot	Uncoated	2	Χ	2	-
9372E	Sleeve	12"	Premium	Kevlar®	N/A	Plain	Uncoated	2	Χ	3	
9372	Sleeve	12"	Premium	Kevlar [®]	N/A	Plain	Uncoated	2	Χ	2	
9372T	Sleeve	12"	Premium	Kevlar [®]	N/A	Thumb Slot	Uncoated	2	Χ	2	
9374E	Sleeve	14"	Competitive Value	Kevlar®	N/A	Plain	Uncoated	2	Χ	3	
9374	Sleeve	14"	Premium	Kevlar [®]	N/A	Plain	Uncoated	2	Χ	2	
9374T	Sleeve	14"	Premium	Kevlar®	N/A	Thumb Slot	Uncoated	2	Χ	2	
9378BE	Sleeve	18"	Competitive Value	Kevlar®	N/A	Bar Tack	Uncoated	2	Χ	3	
9378E	Sleeve	18"	Competitive Value	Kevlar [®]	N/A	Plain	Uncoated	2	Χ	3	
9378TE	Sleeve	18"	Competitive Value	Kevlar®	N/A	Thumb Slot	Uncoated	2	Χ	3	
9378TES	Sleeve	18"	Competitive Value	Kevlar [®]	N/A	Thumb Slot	Uncoated	2	Χ	3	
9378	Sleeve	18"	Premium	Kevlar®	N/A	Plain	Uncoated	2	Χ	2	
9178T	Sleeve	18"	Premium	Kevlar®	N/A	Thumb Slot	Uncoated	2	Χ	2	
9378B	Sleeve	18"	Premium	Kevlar®	N/A	Bar Tack	Uncoated	2	Χ	2	8
9378T	Sleeve	18"	Premium	Kevlar [®]	N/A	Thumb Slot	Uncoated	2	Χ	2	
9378KC	Sleeve	18"	Premium	Kevlar® Blend	N/A	Plain	Uncoated	2	Χ	3	1
9378KCT	Sleeve	18"	Premium	Kevlar® Blend	N/A	Thumb Slot	Uncoated	2	Χ	3	8
9379	Sleeve	22"	Premium	Kevlar [®]	N/A	Plain	Uncoated	2	Χ	2	ı
9379KCT	Sleeve	22"	Premium	Kevlar® Blend	N/A	Thumb Slot	Uncoated	2	Χ	3	B
9379KCTE	Sleeve	22"	Competitive Value	Kevlar® Blend	N/A	Thumb Slot	Uncoated	2	Χ	3	
9379KCTJ	Sleeve	22"	Premium	Kevlar® Blend	N/A	Thumb Slot	Uncoated	2	Χ	3	
93724T	Sleeve	24"	Premium	Kevlar [®]	N/A	Thumb Slot	Uncoated	2	Χ	2	1







9372 Size: 12"

- Made with DuPont[™] Kevlar[®] trusted cut protection
- 12" Length protection up to the elbow Working near or coming in contact with sharp/abrasive materials





- Made with DuPont[™] Kevlar[®] trusted cut protection
- 14" Length protection over the elbow Working near or coming in contact with sharp/abrasive materials



Kevlar.

9178T Size: 18"

- Made with DuPont[™] Kevlar[®] trusted cut protection
- 18" Length with Thumb Slot protection up to the biceps Working near or coming in contact with sharp/abrasive materials, Great for dirty environments



9379 Size: 22"

- Made with DuPont[™] Kevlar[®] trusted cut protection
- 22" Length protection over the biceps Working near or coming in contact with sharp/abrasive materials



Kevlar.

9378B Size: 18"


- Made with DuPont[™] Kevlar[®] trusted cut protection
- 18" Length with Bar Tack protection up to the biceps Working near or coming in contact with sharp/abrasive materials





- Made with DuPont[™] Kevlar[®] trusted cut protection
- 24" Length with Thumb Slot protection over the biceps Working near or coming in contact with sharp/abrasive materials



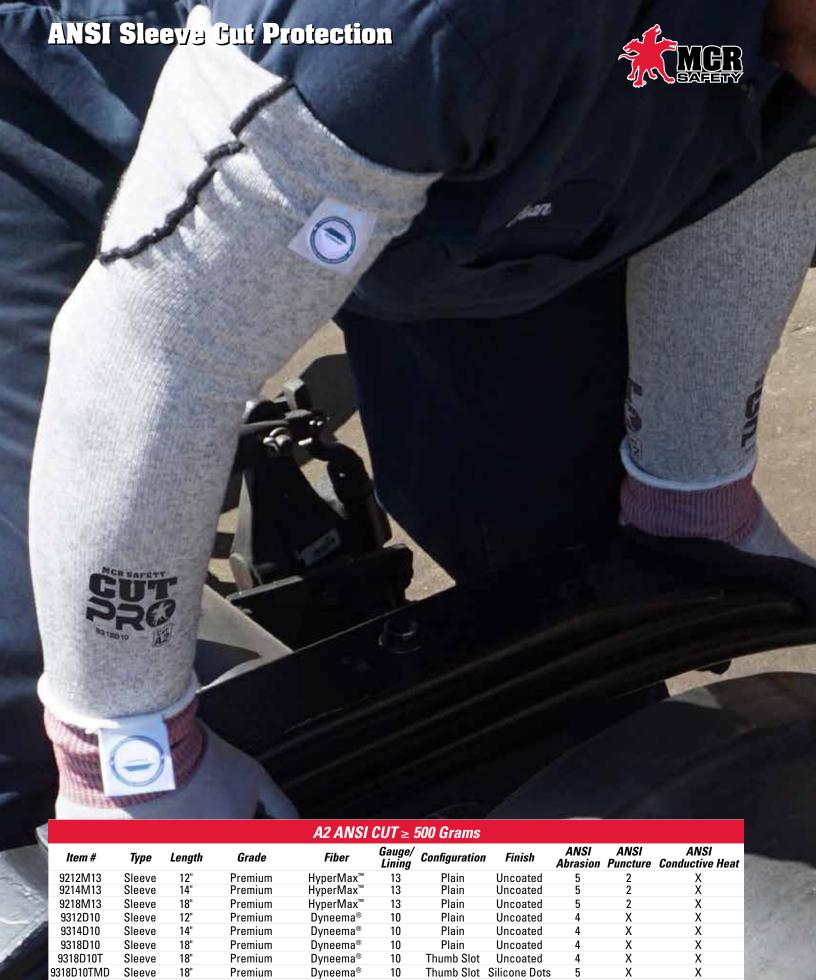

Dyneema®

Dyneema®

Kevlar®

7

7

N/A

Plain

Thumb Slot

Plain

Uncoated

Uncoated

Uncoated

9318D7

9318D7T

9370

Sleeve

Sleeve

Sleeve

18"

18"

8"

Premium

Premium

Premium

Χ

Χ

X


Χ

Χ

Χ







- Hypermax[™] engineered yarn cut protection and comfort in one
- 12" length Protection up to the elbow Working near or coming in contact with sharp/abrasive materials









9218M13 Size: 18"

- Hypermax[™] engineered yarn cut protection and comfort in one
- 18" length Protection up to the elbow Working near or coming in contact with sharp/abrasive materials





- Dyneema® protection without fiberglass -Protection over the elbow
- Advanced Elbow Gusset Great range of motion and comfort Working near or coming in contact with sharp/abrasive materials











9318D10T Size: 18"

- Dyneema® protection without fiberglass -Protection up to the elbow
- Advanced Elbow Gusset Great range of motion and comfort Working near or coming in contact with sharp/abrasive materials












- Dyneema® protection without fiberglass -Protection up to the biceps
- Double sided Silicone Micro Dots Reduces slice potential
- Advanced Elbow Gusset Great range of motion and comfort Working near or coming in contact with sharp/abrasive materials











- Dyneema® protection without fiberglass -Protection up to the biceps
- Working near or coming in contact with sharp/abrasive materials









